



SPACE HB 190W

FITTINGS FOR INDUSTRIAL HALLS AND WAREHOUSES

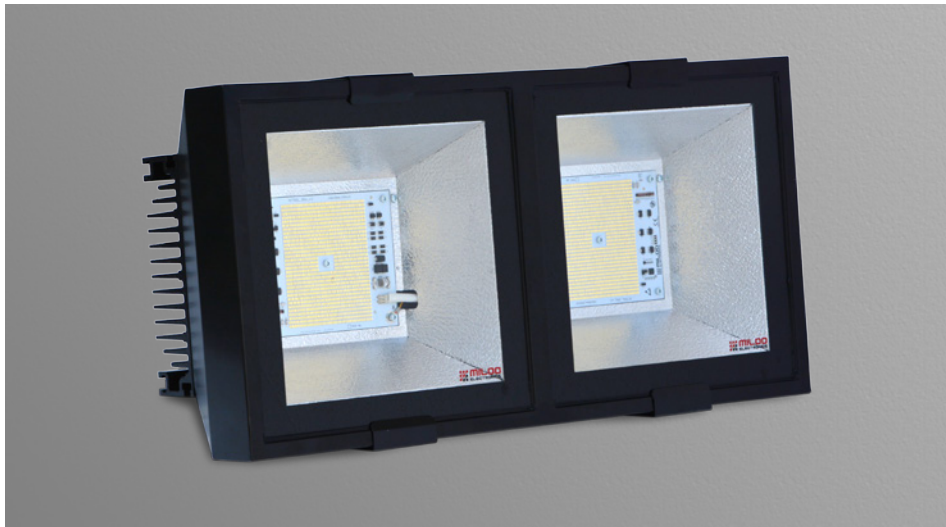

Fittings for a suspended installation

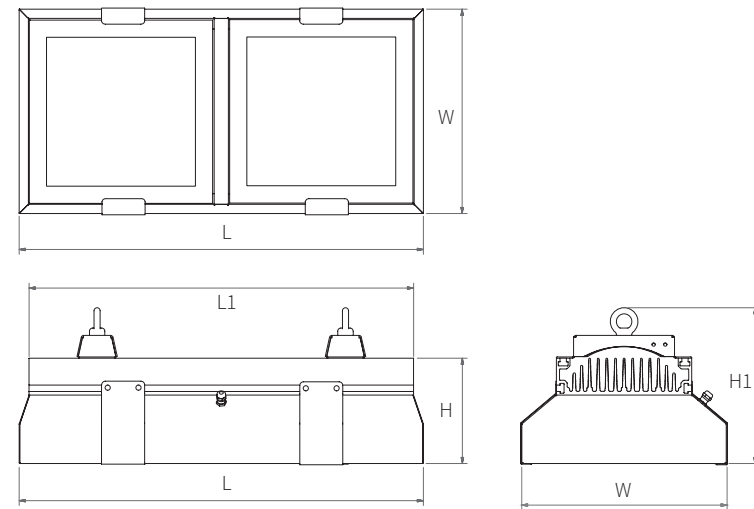

FITTING CODE	DIMENSIONS [mm]					POWER [W]	LUMEN [lm] *	WEIGHT [kg]
	L	L1	W	H	H1			
SPACE HB 190W	657	625	332	171	253	190	20 300	15

* The total luminous flux of the luminaire measured diffuser 25°C

Options



Color temperature





Color of the fitting white /RAL 9003
* Other colors according to RAL palette




DALI DALI Connect

Spectral distribution

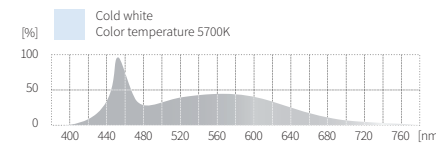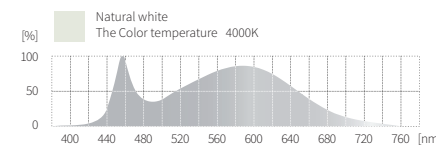

The fixture enclosure is made of stainless steel and an aluminum radiator that conducts heat. The entire light fixture is powder-coated in white. The color of the enclosure can be changed by selecting a desired color from the RAL system. The standard equipment provided with the light fixture includes two integrated light sources fed in the sequential technology. The total power of the light sources is 190 W. The lampshade is made of tempered glass. The fixture is installed in a sling. There are two color temperatures available: 4000K and 5700K.

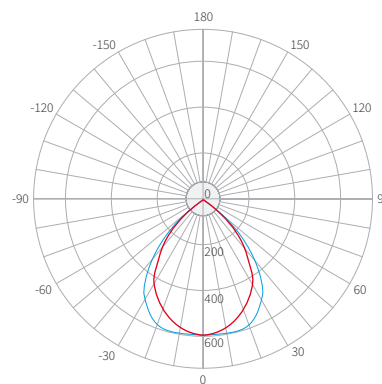

Light distribution curve of the selected fitting SPACE HB 190W
cd/klm — C0 - C180 — C90 - C270


















Lighting parameters

SPACE HB 190W

Luminous flux	20 300 lm
Colour rendering index	85
Color temperature	4000K / 5700K
Beam angle	85°
Electrical parameters	
Power	190 W
Power voltage	220-240 V / 50 Hz
Power factor (PF)	0,99
Nominal current	830 mA
Protection class	I
Other functional parameters	
Protection rating IP	IP65
Operation temperature	od -25°C do +45°C
Ambient humidity	from 20% to 80%
Diffuser	/S - Tempered glass
Mounting	Fittings for a suspended installation

* The total luminous flux of the luminaire measured diffuser 25°C

LEGEND

 LED	LED source	 RoHS COMPLIANT	The RoHS Directive	 /P/D/S	Type of diffuser	 PZH	Hygiene certificate of the National Institute of Hygiene	 220-240 VAC	Power voltage	 CE	Declaration of Conformity
 Ra 85	Color Rendering Index		Protection class I	 120°	Light distribution angle	 45°C	Maximum ambient temperature	 3000K 4000K 5700K	Color temperature		Sequential Power supply
 IP	Protection rating IP		Luminous flux	 IK	IK Protection rating	 A+	Energy efficiency class	 DALI	DALI CONNECT		