

# COMPACT LED EVO P ZK

LED GO!



220-240 V | LED |  |  | IK07 |  CE

## TECHNICAL PARAMETERS

Ingress protection:	IP44/IP20;
Impact resistance:	IK07;
Nominal power [W]:	32.00; 24.00; 42.00; 52.00; 60.00;
Luminous flux [lm]*:	2750 - 8100
Colour temperature [K]:	4000; 3000;
SDCM:	≤ 3;
Energy efficiency class:	A+; A++;
Material of the body:	ABS;
Colour of the body:	white;
Diffuser material:	PC;
Diffuser type:	OPAL; PRM;
Mounting version:	recessed;
Dimensions [mm]:	595/595/71;

\*Tolerance +/- 10%

## CHARACTERISTICS

Compact LED luminaire designed for installation in modular ceilings with concealed plank systems. Equipped with energy-saving LED GO! panels and an evenly highlighted opal diffuser, providing low glare (UGR<19)\*. Made of plastic. Assembly or electrical connection does not require removing the diffuser.

Luminaire compatible with the assembly system: ROCKFON® System T24 X™; compatible modules: Blanca, Color-all, Sonar; compatible module edge: X; max. protrusion of the luminaire above modules level: about 2mm.

\* The UGR coefficient is met for the typical use of the luminaire

## APPLICATION

This luminaire is designed for indoor use in offices or general utility rooms. It can be used as the main light source and it is particularly well-suited to be used as a light source for workplaces that require eyesight focus. The luminaire is used both in new applications, as well as it can replace traditional fluorescent luminaires with energy-saving LED solutions.

# COMPACT LED EVO P ZK

LED GO!

## AVAILABLE TYPES

[Click >> index, to see details](#)

### COMPACT LED EVO P ZK 24W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Energy efficiency class	Electrical protection class	Index
24	4000	2950	OPAL	A+	II	<a href="#">&gt;&gt; 630088</a>
24	3000	2750	OPAL	A+	II	<a href="#">&gt;&gt; 630637</a>
24	4000	3550	PRM	A++	II	<a href="#">&gt;&gt; 630644</a>
24	3000	3300	PRM	A++	II	<a href="#">&gt;&gt; 630651</a>

### COMPACT LED EVO P ZK 32W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Energy efficiency class	Electrical protection class	Index
32	4000	3800	OPAL	A+	II	<a href="#">&gt;&gt; 630071</a>
32	3000	3550	OPAL	A+	II	<a href="#">&gt;&gt; 630606</a>
32	4000	4550	PRM	A++	II	<a href="#">&gt;&gt; 630613</a>
32	3000	4250	PRM	A+	II	<a href="#">&gt;&gt; 630620</a>

### COMPACT LED EVO P ZK 42W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Energy efficiency class	Electrical protection class	Index
42	4000	4800	OPAL	A+	II	<a href="#">&gt;&gt; 630095</a>
42	3000	4450	OPAL	A+	II	<a href="#">&gt;&gt; 630668</a>
42	4000	5750	PRM	A++	II	<a href="#">&gt;&gt; 630675</a>
42	3000	5350	PRM	A+	II	<a href="#">&gt;&gt; 630682</a>

### COMPACT LED EVO P ZK 52W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Energy efficiency class	Electrical protection class	Index
52	4000	5450	OPAL	A+	II	<a href="#">&gt;&gt; 630699</a>
52	3000	5050	OPAL	A+	II	<a href="#">&gt;&gt; 630705</a>
52	4000	6550	PRM	A+	II	<a href="#">&gt;&gt; 630712</a>
52	3000	6100	PRM	A+	II	<a href="#">&gt;&gt; 630729</a>

### COMPACT LED EVO P ZK 60W


Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Energy efficiency class	Electrical protection class	Index
60	4000	6750	OPAL	A+	I	<a href="#">&gt;&gt; 630736</a>
60	3000	6300	OPAL	A+	I	<a href="#">&gt;&gt; 630743</a>
60	4000	8100	PRM	A+	I	<a href="#">&gt;&gt; 630750</a>
60	3000	7550	PRM	A+	I	<a href="#">&gt;&gt; 630767</a>

\*Tolerance +/- 10%

# COMPACT LED EVO P ZK

LED GO!

## LUMINOUS INTENSITY DISTRIB. CURVE

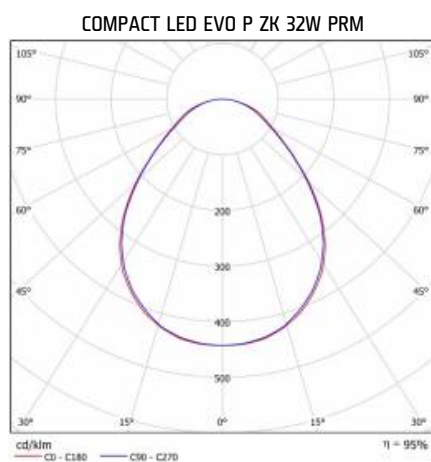

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer.

Revision date: 2019-05-16



Lena Lighting S.A.  
ul. Kórnicka 52  
63-000 Środa Wielkopolska

tel. +48 61 28 60 300  
e-mail: office@lenalighting.pl  
www.lenalighting.pl



The luminaire complies with the EU RoHS Directive 2011/65/UE



This product is a subject to electric and electronic waste equipment regulations (WEEE).



01/2018