

VECTOR 3 LED BASIC



220-240 V | LED | IP40 | IK07
50-60 Hz

TECHNICAL PARAMETERS

Ingress protection:	IP40;
Impact resistance:	IK07;
Nominal power [W]:	31.00 - 77.00
Luminous flux [lm]*:	3100 - 8900
Colour temperature [K]:	4000;
Colour rendering index:	>80;
SDCM:	≤ 3;
Energy efficiency class:	A; A+;
Material of the body:	Raw steel sheet, powder coated;
Diffuser material:	PC;
Diffuser type:	PRM MAT; PRM;
Mounting version:	surface;
Dimensions [mm]:	601/126/60; 1161/126/60; 1441/126/60;

*Tolerance +/- 10%

CHARACTERISTICS

Surface mounted luminaire made of powder coated white steel with prismatic or prismatic mat PC diffuser providing soft & uniform light. Equipped with LED GO! modules with high luminous efficacy and SDCM <3. The luminaire in standard version has a 5 pole terminal block, that enables quick through-wiring, and strain relief.

Available versions:

- motion sensor (RCR).

APPLICATION

Multi-purpose LED luminaire designed for indoor application. Especially recommended for public rooms and corridors (administration buildings, schools, universities and health care buildings).

VECTOR 3 LED BASIC

AVAILABLE TYPES

[Click >> index, to see details](#)

VECTOR 3 LED BASIC 1161/126/60mm

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	Energy efficiency class	Index
41	4000	5000	PRM		A+	>> 661044
41	4000	5000	PRM	yes	A+	>> 66105
41	4000	4300	PRM MAT		A+	>> 661013
41	4000	4300	PRM MAT	yes	A+	>> 661075

VECTOR 3 LED BASIC 1441/126/60mm

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	Energy efficiency class	Index
77	4000	8900	PRM		A+	>> 661051
77	4000	8900	PRM	yes	A+	>> 661112
77	4000	7700	PRM MAT		A	>> 661020
77	4000	7700	PRM MAT	yes	A	>> 661082


VECTOR 3 LED BASIC 601/126/60mm

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	Energy efficiency class	Index
31	4000	3600	PRM		A+	>> 661037
31	4000	3600	PRM	yes	A+	>> 661099
31	4000	3100	PRM MAT		A	>> 661006
31	4000	3100	PRM MAT	yes	A	>> 661068


*Tolerance +/- 10%

LUMINOUS INTENSITY DISTRIB. CURVE

VECTOR 3 LED PRM

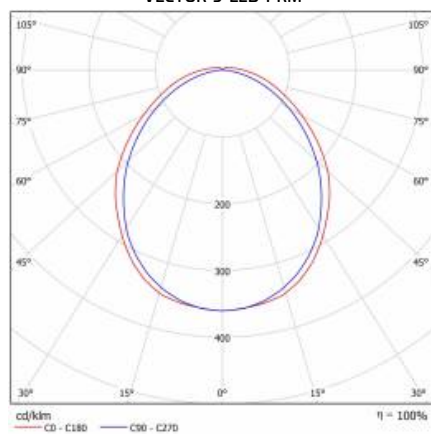

VECTOR 3 LED PRM MAT

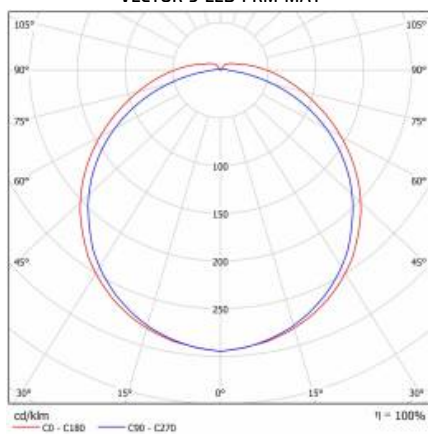

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer.

Revision date: 2019-09-25



Lena Lighting S.A.
ul. Kórnicka 52
63-000 Środa Wielkopolska

tel. +48 61 28 60 300
e-mail: office@lenalighting.pl
www.lenalighting.pl



The luminaire complies with the EU RoHS Directive 2011/65/UE



This product is a subject to electric and electronic waste equipment regulations (WEEE).



18/2019