


 220-240V
50/60 Hz

 IK
04

 IP
20


Recessed modern downlight, for LED light sources, for suspended ceilings with adjustable optics.

TECHNICAL DATA

Mounting: in the ceiling, with mounting brackets (included)

Body: high pressure die-cast aluminum

Colour: white

ELECTRICAL DATA

Power supply efficiency: >89%

Power: 220-240V 50/60Hz

Includes light source: yes

Type of equipment: ED

Electrical connection: max 2x1,5 mm² wire

OPTICAL DATA

Light distribution: circular

Way of lighting: direct

Reflector: aluminum polished faceted

GENERAL DATA

Lifetime (L80B10): 60 000 h

Available on request: DALI

Warranty: 5 years

Application: boutiques, delicatessen, jeweler, shopping centers, supermarkets, museums



Code	Beam angle	Luminaire power [W]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra	Operating temperature range [°C]
030361.5L01.301	11°	27	2500	93	3000	≥80	0 ... +35
030361.5L01.302	28°	27	2600	96	3000	≥80	0 ... +35
030361.5L01.303	39°	27	2500	93	3000	≥80	0 ... +35
030361.5L02.301	11°	28	2700	96	4000	≥80	0 ... +35
030361.5L02.302	28°	28	2750	98	4000	≥80	0 ... +35
030361.5L02.303	39°	28	2700	96	4000	≥80	0 ... +35
030361.5L03.301	11°	35	3400	97	3000	≥80	0 ... +35
030361.5L03.302	28°	35	3350	96	3000	≥80	0 ... +35
030361.5L03.303	39°	35	3350	96	3000	≥80	0 ... +35
030361.5L04.301	11°	35	3450	99	4000	≥80	0 ... +35
030361.5L04.302	28°	35	3500	100	4000	≥80	0 ... +35
030361.5L04.303	39°	35	3450	99	4000	≥80	0 ... +35
030361.5L05.301	11°	49	4050	83	3000	≥80	0 ... +25
030361.5L05.302	28°	49	4100	84	3000	≥80	0 ... +25
030361.5L05.303	39°	49	4050	83	3000	≥80	0 ... +25
030361.5L06.301	11°	49	4150	85	4000	≥80	0 ... +25
030361.5L06.302	28°	49	4250	87	4000	≥80	0 ... +25
030361.5L06.303	39°	49	4200	86	4000	≥80	0 ... +25

Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.


Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com

Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.

The parameters in the data sheet are given for Ta=25°C.


Code	Dimensions [mm] W H	Mounting dimensions [mm] W	Pallet quantity	Quantity in package	Net weight [kg]
030361.5L01.301	194 170	180	216	1	1.5
030361.5L01.302	194 170	180	216	1	1.5
030361.5L01.303	194 170	180	216	1	1.5
030361.5L02.301	194 170	180	216	1	1.5
030361.5L02.302	194 170	180	216	1	1.5
030361.5L02.303	194 170	180	216	1	1.5
030361.5L03.301	194 170	180	216	1	1.5
030361.5L03.302	194 170	180	216	1	1.5
030361.5L03.303	194 170	180	216	1	1.5
030361.5L04.301	194 170	180	216	1	1.5
030361.5L04.302	194 170	180	216	1	1.5
030361.5L04.303	194 170	180	216	1	1.5
030361.5L05.301	194 170	180	216	1	1.5
030361.5L05.302	194 170	180	216	1	1.5
030361.5L05.303	194 170	180	216	1	1.5
030361.5L06.301	194 170	180	216	1	1.5
030361.5L06.302	194 170	180	216	1	1.5
030361.5L06.303	194 170	180	216	1	1.5



OTHER PICTURES



LIGHT BEAM CURVES

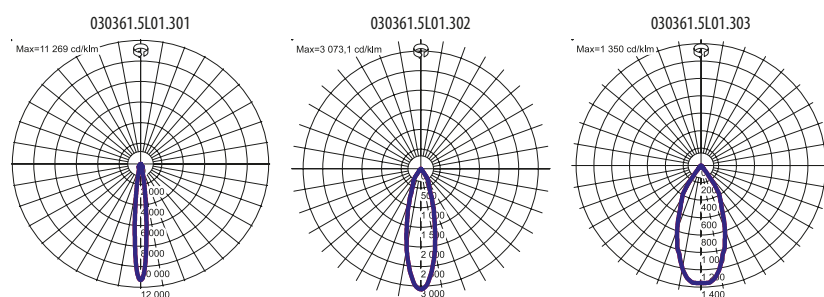

Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.


Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com

Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.


The parameters in the data sheet are given for Ta=25°C.

WAY OF LIGHTING


030361.5L01.301



030361.5L01.302



030361.5L01.303

**OTHER PROJECTS**

Supermarket Intermarche, Bukowna, Poland



FLAIR MODE boutique, Vendaam Shopping Mall, Groningen, The Netherlands



AGATA MEBLE furniture showroom, Krakow, Poland

Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com

Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.

The parameters in the data sheet are given for Ta=25°C.