

# SQ 300 LED PLUS

LED GO!



220-240 V  
50-60 Hz

LED



IK08

## TECHNICAL PARAMETERS

Ingress protection:	IP54;
Impact resistance:	IK08;
Nominal power [W]:	24.00;
Luminous flux [lm]*:	2100 - 2300
Colour temperature [K]:	4000; 3000;
Energy efficiency class:	A;
Material of the body:	ABS;
Diffuser material:	PC;
Diffuser type:	OPAL;
Mounting version:	surface;
Dimensions [mm]:	300/300/58;

\*Tolerance +/- 10%

## CHARACTERISTICS

SQ 300 LED is a new line of square ceiling lamps. The construction, designed from scratch, introduces new solutions ensuring excellent lighting parameters. The body is made of plastic, thanks to which it is characterized by low weight and high impact resistance (IK08). The diffuser made of PC polycarbonate provides the lamp with excellent lighting properties. Integrated GO LED panel! It provides low power consumption and all the advantages of modern lamps with an LED source.

The PLUS version of the luminaire line is equipped with brand components from recognized global manufacturers. It is characterized by extended life and warranty, increased light efficiency and optimal use of electricity (Power Factor).

## APPLICATION

The surface-mounted luminaire for ceiling or wall mounting is intended for indoor use: utility rooms, staircases, passageways. It is recommended for use in public areas.

# SQ 300 LED PLUS

LED GO!

## AVAILABLE TYPES


[Click >> index, to see details](#)

### SQ 300 LED PLUS 24W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	DIMM DALI	Emergency lighting [h]	Colour of the body	Energy efficiency class	Index
24	3000	2100	OPAL			3	white	A	<a href="#">&gt;&gt; 664267</a>
24	3000	2100	OPAL				white	A	<a href="#">&gt;&gt; 664229</a>
24	3000	2100	OPAL				black	A	<a href="#">&gt;&gt; 664274</a>
24	4000	2300	OPAL			3	white	A	<a href="#">&gt;&gt; 664175</a>
24	4000	2300	OPAL			3	black	A	<a href="#">&gt;&gt; 664212</a>
24	4000	2300	OPAL				white	A	<a href="#">&gt;&gt; 664144</a>
24	3000	2100	OPAL	yes			white	A	<a href="#">&gt;&gt; 664243</a>
24	4000	2300	OPAL	yes			white	A	<a href="#">&gt;&gt; 664151</a>
24	3000	2100	OPAL			3	black	A	<a href="#">&gt;&gt; 664304</a>
24	4000	2300	OPAL				black	A	<a href="#">&gt;&gt; 664182</a>
24	3000	2100	OPAL	yes			black	A	<a href="#">&gt;&gt; 664281</a>
24	4000	2300	OPAL	yes			black	A	<a href="#">&gt;&gt; 664199</a>
24	3000	2100	OPAL		yes		white	A	<a href="#">&gt;&gt; 664250</a>
24	4000	2300	OPAL		yes		white	A	<a href="#">&gt;&gt; 664168</a>
24	3000	2100	OPAL		yes		black	A	<a href="#">&gt;&gt; 664298</a>
24	4000	2300	OPAL		yes		black	A	<a href="#">&gt;&gt; 664205</a>

\*Tolerance +/- 10%

## LUMINOUS INTENSITY DISTRIB. CURVE

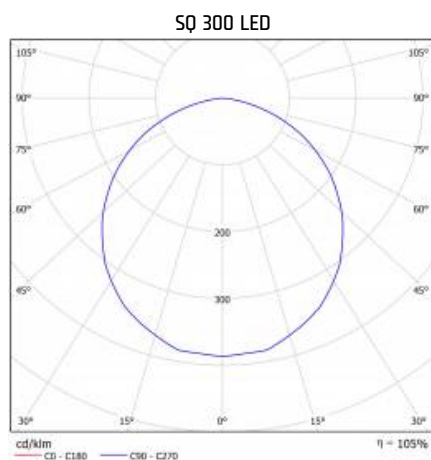

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer.

Revision date: 2020-04-06



Lena Lighting S.A.  
 ul. Kórnicka 52  
 63-000 Środa Wielkopolska

tel. +48 61 28 60 300  
 e-mail: office@lenalighting.pl  
 www.lenalighting.pl



The luminaire complies with the EU RoHS Directive 2011/65/UE



This product is a subject to electric and electronic waste equipment regulations (WEEE).



58/2020