

# COMPACT LED EVO Z

LED



220-240 V | 50-60 Hz | LED |  |  | IP20 | IK07 |  CE

## TECHNICAL PARAMETERS

Light source:	LED module;
Ingress protection:	IP20;
Impact resistance:	IK07;
Nominal power [W]:	24.00 - 52.00
Luminous flux [lm]*:	2750 - 6550
Colour temperature [K]:	3000; 4000;
Colour rendering index:	>80;
SDCM:	≤ 3;
Energy efficiency class:	A+; A++;
Electrical protection class:	II; I;
Material of the body:	ABS;
Colour of the body:	white;
Diffuser material:	PC;
Diffuser type:	OPAL; PRM;
Mounting version:	suspended;
Dimensions [mm]:	620/620/69;
Warranty [years]:	5

\*Tolerance +/- 10%

## CHARACTERISTICS

Compact LED luminaire designed for suspended installation. Equipped with energy-saving LED GO! panels and an evenly highlighted opal or prismatic diffuser, providing low glare (UGR<19)\*. Made of plastic. Assembly or electrical connection does not require removing the diffuser. Suspension in the set, length 1.2m.

\* The UGR coefficient is met for the typical use of the luminaire

## APPLICATION

This luminaire is designed for indoor use in offices or general utility rooms. It can be used as the main light source and it is particularly well-suited to be used as a light source for workplaces that require eyesight focus. The luminaire is used both in new applications, as well as it can replace traditional fluorescent luminaires with energy-saving LED solutions.

[COMPACT LED product site](#)

# COMPACT LED EVO Z

**LED**
**AVAILABLE TYPES**
[Click >> index, to see details](#)
**COMPACT LED EVO Z 24W**

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	DIMM DALI	Corridor function	Energy efficiency class	Index
24	3000	2750	OPAL				A+	<a href="#">&gt;&gt; 628825</a>
24	4000	2950	OPAL				A+	<a href="#">&gt;&gt; 628801</a>
24	3000	3300	PRM				A+	<a href="#">&gt;&gt; 628832</a>
24	4000	3550	PRM				A++	<a href="#">&gt;&gt; 628818</a>

**COMPACT LED EVO Z 32W**

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	DIMM DALI	Corridor function	Energy efficiency class	Index
32	3000	3550	OPAL				A+	<a href="#">&gt;&gt; 628863</a>
32	4000	3800	OPAL				A+	<a href="#">&gt;&gt; 628849</a>
32	3000	4250	PRM				A+	<a href="#">&gt;&gt; 628870</a>
32	4000	4550	PRM				A++	<a href="#">&gt;&gt; 628856</a>

**COMPACT LED EVO Z 42W**

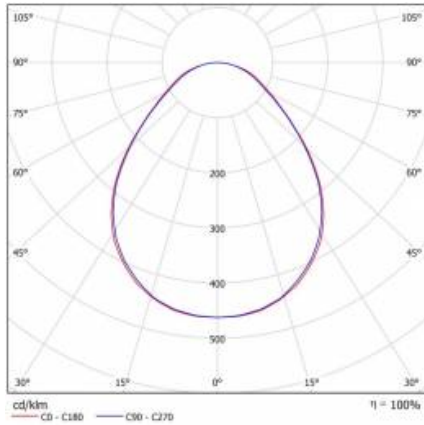
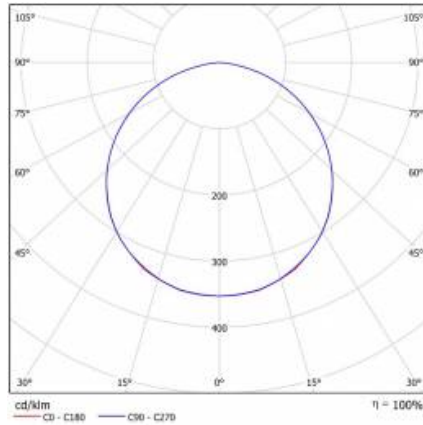
Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	DIMM DALI	Corridor function	Energy efficiency class	Index
42	3000	4450	OPAL				A+	<a href="#">&gt;&gt; 628900</a>
42	4000	4800	OPAL				A+	<a href="#">&gt;&gt; 628887</a>
42	3000	4450	OPAL		yes		A+	<a href="#">&gt;&gt; 629761</a>
42	4000	4800	OPAL		yes		A+	<a href="#">&gt;&gt; 629747</a>
42	3000	5350	PRM				A+	<a href="#">&gt;&gt; 628917</a>
42	4000	5750	PRM				A+	<a href="#">&gt;&gt; 628894</a>
42	3000	5350	PRM		yes		A+	<a href="#">&gt;&gt; 629778</a>
42	4000	5750	PRM		yes		A+	<a href="#">&gt;&gt; 629754</a>
42	4000	4800	PRM	yes	yes	yes	A+	<a href="#">&gt;&gt; 630149</a>

**COMPACT LED EVO Z 52W**

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	DIMM DALI	Corridor function	Energy efficiency class	Index
52	3000	5050	OPAL				A+	<a href="#">&gt;&gt; 628948</a>
52	4000	5450	OPAL				A+	<a href="#">&gt;&gt; 628924</a>
52	3000	5050	OPAL		yes		A+	<a href="#">&gt;&gt; 629808</a>
52	4000	5450	OPAL		yes		A+	<a href="#">&gt;&gt; 629785</a>
52	3000	6100	PRM				A+	<a href="#">&gt;&gt; 628955</a>
52	4000	6550	PRM				A+	<a href="#">&gt;&gt; 628931</a>
52	3000	6100	PRM		yes		A+	<a href="#">&gt;&gt; 629815</a>
52	4000	6550	PRM		yes		A+	<a href="#">&gt;&gt; 629792</a>
52	4000	6550	PRM	yes	yes	yes	A+	<a href="#">&gt;&gt; 630163</a>

\*Tolerance +/- 10%

# COMPACT LED EVO Z

**LED**
**LUMINOUS INTENSITY DISTRIB. CURVE**
**COMPACT LED EVO N PRM**

**COMPACT LED EVO P ZK 32W 3000K OPAL**


The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer.

Revision date: 2020-11-12



Lena Lighting S.A.  
ul. Kórnicka 52  
63-000 Środa Wielkopolska

tel. +48 61 28 60 300  
e-mail: office@lenalighting.pl  
www.lenalighting.pl



The luminaire complies with the EU ROHS Directive 2011/65/UE



This product is a subject to electric and electronic waste equipment regulations (WEEE).



20/2017