



220-240 V | LED |  | IP65 | IP66 | IK08

## TECHNICAL PARAMETERS

Ingress protection:	IP66;
Impact resistance:	IK08;
Nominal power [W]:	26.00 - 212.00
Luminous flux [lm]*:	4500 - 34000
Colour temperature [K]:	4000;
Colour rendering index:	>80;
SDCM:	≤ 3;
Energy efficiency class:	A++;
Material of the body:	aluminium;
Diffuser material:	glass;
Diffuser type:	transparent;
Mounting version:	surface, suspended;
Dimensions [mm]:	1150/63/55; 1450/63/55; 1250/104/135; 1450/104/135;

\*Tolerance +/- 10%

## CHARACTERISTICS

INDUSTRY IP66 LED is a hermetic beam from the NEXT GEN line, which is a new generation of lamps dedicated to LED technology.

The body, made from scratch, made of aluminum profile and subjected to anodization process, provides the luminaire with strength and solidity, and the narrow side profile allows installation in hard to reach places.

LEDs from a reputable manufacturer and new LED modules have an impact on very high luminous efficacy: up to 163 lm / W. This guarantees that the required lighting level is achieved and that significant energy savings are achieved.

The lampshade is made of UV resistant tempered glass.

The combination of materials (aluminum and toughened glass) and a non-dismantled construction with an external connector provides the luminaire with high resistance to harsh environmental conditions.

Suitable for surface and suspended mounting.

## APPLICATION

The multi-purpose LED luminaire has been designed for use in areas requiring high dust and water resistance. It is especially recommended for use in rooms intended for medical and laboratory purposes as well as in industrial premises.

# INDUSTRY IP66 LED

LED

## AVAILABLE TYPES

[Click >> index, to see details](#)

### INDUSTRY IP66 LED 26W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	DIMM DALI	Dimensions [mm]	Energy efficiency class	Index
26	4000	4500		1150/63/55	A++	<a href="#">&gt;&gt; 552007</a>
26	4000	4500	yes	1150/63/55	A++	<a href="#">&gt;&gt; 552076</a>

### INDUSTRY IP66 LED 46W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	DIMM DALI	Dimensions [mm]	Energy efficiency class	Index
46	4000	7800		1150/63/55	A++	<a href="#">&gt;&gt; 552014</a>
46	4000	7800	yes	1150/63/55	A++	<a href="#">&gt;&gt; 552083</a>

### INDUSTRY IP66 LED 67W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	DIMM DALI	Dimensions [mm]	Energy efficiency class	Index
67	4000	11000		1150/63/55	A++	<a href="#">&gt;&gt; 552021</a>
67	4000	11000	yes	1150/63/55	A++	<a href="#">&gt;&gt; 552090</a>

### INDUSTRY IP66 LED 83W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	DIMM DALI	Dimensions [mm]	Energy efficiency class	Index
83	4000	13800		1450/63/55	A++	<a href="#">&gt;&gt; 552052</a>
83	4000	13800	yes	1450/63/55	A++	<a href="#">&gt;&gt; 552120</a>

### INDUSTRY IP66 LED 85W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	DIMM DALI	Dimensions [mm]	Energy efficiency class	Index
85	4000	13600		1150/63/55	A++	<a href="#">&gt;&gt; 552038</a>
85	4000	13600	yes	1150/63/55	A++	<a href="#">&gt;&gt; 552106</a>

### INDUSTRY IP66 LED 106W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	DIMM DALI	Dimensions [mm]	Energy efficiency class	Index
106	4000	17000		1450/63/55	A++	<a href="#">&gt;&gt; 552069</a>
106	4000	17000	yes	1450/63/55	A++	<a href="#">&gt;&gt; 552137</a>

### INDUSTRY IP66 LED 170W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	DIMM DALI	Dimensions [mm]	Energy efficiency class	Index
170	4000	27200		1250/104/135	A++	<a href="#">&gt;&gt; 552434</a>

### INDUSTRY IP66 LED 212W


Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	DIMM DALI	Dimensions [mm]	Energy efficiency class	Index
212	4000	34000		1450/104/135	A++	<a href="#">&gt;&gt; 552441</a>

\*Tolerance +/- 10%

# INDUSTRY IP66 LED

**LED**

## LUMINOUS INTENSITY DISTRIB. CURVE

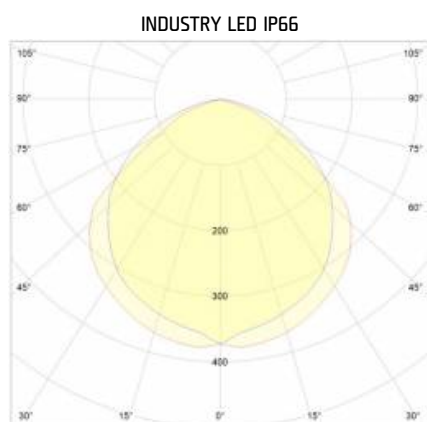

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer.

Revision date: 2020-11-13



Lena Lighting S.A.  
ul. Kórnicka 52  
63-000 Środa Wielkopolska

tel. +48 61 28 60 300  
e-mail: office@lenalighting.pl  
www.lenalighting.pl



The luminaire complies with the EU RoHS Directive 2011/65/UE



This product is a subject to electric and electronic waste equipment regulations (WEEE).

