

VECTOR 3 LED

LED



220-240 V | LED |  | IP40 | IK07

TECHNICAL PARAMETERS

Ingress protection:	IP40;
Impact resistance:	IK07;
Nominal power [W]:	16.00 - 60.00
Luminous flux [lm]*:	1950 - 6900
Colour temperature [K]:	3000; 4000;
Colour rendering index:	>80;
SDCM:	≤ 3;
Energy efficiency class:	A+;
Material of the body:	powder coated steel;
Diffuser material:	PC;
Diffuser type:	PRM MAT;
Mounting version:	surface;
Dimensions [mm]:	1161/61/125; 601/61/125; 1441/126/60;
Warranty [years]:	up to 5

*Tolerance +/- 10%

CHARACTERISTICS

Surface mounted luminaire made of powder coated white steel with prismatic or prismatic mat PC diffuser providing soft & uniform light. Equipped with LED GO! modules with high luminous efficacy and SDCM <3. The luminaire in standard version has a 5 pole terminal block, that enables quick through-wiring, and strain relief.

APPLICATION

Multi-purpose LED luminaire designed for indoor application. Especially recommended for public rooms and corridors (administration buildings, schools, universities and health care buildings).

VECTOR 3 LED

LED

AVAILABLE TYPES

[Click >> index, to see details](#)

VECTOR 3 LED 16W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	Corridor function	DIMM DALI	Through wiring	Emergency lighting [h]	Dimensions [mm]	Energy efficiency class	Index
16	3000	1950	PRM MAT						601/61/125	A+	>> 661228
16	4000	2100	PRM MAT						601/61/125	A+	>> 661211
16	3000	1950	PRM MAT	yes					601/61/125	A+	>> 661389
16	4000	2100	PRM MAT	yes					601/61/125	A+	>> 661372
16	3000	1950	PRM MAT			yes			601/61/125	A+	>> 661501
16	4000	2100	PRM MAT			yes			601/61/125	A+	>> 661495
16	3000	1950	PRM MAT	yes	yes	yes			601/61/125	A+	>> 661624
16	4000	2100	PRM MAT	yes	yes	yes			601/61/125	A+	>> 661617

VECTOR 3 LED 24W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	Corridor function	DIMM DALI	Through wiring	Emergency lighting [h]	Dimensions [mm]	Energy efficiency class	Index
24	3000	2600	PRM MAT						601/61/125	A+	>> 661266
24	4000	2750	PRM MAT						601/61/125	A+	>> 661259
24	3000	2600	PRM MAT	yes					601/61/125	A+	>> 661402
24	4000	2750	PRM MAT	yes					601/61/125	A+	>> 661396
24	3000	2600	PRM MAT			yes			601/61/125	A+	>> 661525
24	4000	2750	PRM MAT			yes			601/61/125	A+	>> 661518
24	3000	2600	PRM MAT	yes	yes	yes			601/61/125	A+	>> 661648
24	4000	2750	PRM MAT	yes	yes	yes			601/61/125	A+	>> 661631

VECTOR 3 LED 32W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	Corridor function	DIMM DALI	Through wiring	Emergency lighting [h]	Dimensions [mm]	Energy efficiency class	Index
32	3000	3850	PRM MAT						1161/61/125	A+	>> 661242
32	4000	4150	PRM MAT						1161/61/125	A+	>> 661235
32	3000	3850	PRM MAT					3	1161/61/125	A+	>> 661747
32	4000	4150	PRM MAT					3	1161/61/125	A+	>> 661730
32	3000	3850	PRM MAT				LS2		1161/61/125	A+	>> 661822

VECTOR 3 LED

LED

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	Corridor function	DIMM DALI	Through wiring	Emergency lighting [h]	Dimensions [mm]	Energy efficiency class	Index
32	4000	4150	PRM MAT				LS2		1161/61/125	A+	>> 661815
32	3000	3850	PRM MAT	yes					1161/61/125	A+	>> 661426
32	4000	4150	PRM MAT	yes					1161/61/125	A+	>> 661419
32	3000	3850	PRM MAT			yes			1161/61/125	A+	>> 661549
32	4000	4150	PRM MAT			yes			1161/61/125	A+	>> 661532
32	3000	3850	PRM MAT	yes	yes	yes			1161/61/125	A+	>> 661662
32	4000	4150	PRM MAT	yes	yes	yes			1161/61/125	A+	>> 661655

VECTOR 3 LED 40W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	Corridor function	DIMM DALI	Through wiring	Emergency lighting [h]	Dimensions [mm]	Energy efficiency class	Index
40	3000	4700	PRM MAT						1441/126/60	A+	>> 661365
40	4000	5100	PRM MAT						1441/126/60	A+	>> 661358
40	3000	4700	PRM MAT					3	1441/126/60	A+	>> 661785
40	4000	5100	PRM MAT					3	1441/126/60	A+	>> 661778
40	3000	4700	PRM MAT				LS2		1441/126/60	A+	>> 661860
40	4000	5100	PRM MAT				LS2		1441/126/60	A+	>> 661853
40	3000	4700	PRM MAT	yes					1441/126/60	A+	>> 661464
40	4000	5100	PRM MAT	yes					1441/126/60	A+	>> 661457
40	4000	5100	PRM MAT			yes			1441/126/60	A+	>> 661570
40	3000	4700	PRM MAT	yes	yes	yes			1441/126/60	A+	>> 661709
40	4000	5100	PRM MAT	yes	yes	yes			1441/126/60	A+	>> 661693

VECTOR 3 LED 48W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	Corridor function	DIMM DALI	Through wiring	Emergency lighting [h]	Dimensions [mm]	Energy efficiency class	Index
48	3000	5300	PRM MAT						1161/61/125	A+	>> 661280
48	3000	5300	PRM MAT					3	1161/61/125	A+	>> 661761
48	4000	5700	PRM MAT					3	1161/61/125	A+	>> 661754
48	3000	5300	PRM MAT				LS2		1161/61/125	A+	>> 661846
48	4000	5700	PRM MAT				LS2		1161/61/125	A+	>> 661839
48	3000	5300	PRM MAT	yes					1161/61/125	A+	>> 661440

VECTOR 3 LED

LED

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	Corridor function	DIMM DALI	Through wiring	Emergency lighting [h]	Dimensions [mm]	Energy efficiency class	Index
48	4000	5700	PRM MAT	yes					1161/61/125	A+	>> 661433
48	3000	5300	PRM MAT			yes			1161/61/125	A+	>> 661563
48	4000	5700	PRM MAT			yes			1161/61/125	A+	>> 661556
48	4000	5700	PRM MAT						1161/61/125	A+	>> 661273
48	3000	5300	PRM MAT	yes	yes	yes			1161/61/125	A+	>> 661686
48	4000	5700	PRM MAT	yes	yes	yes			1161/61/125	A+	>> 661679

VECTOR 3 LED 60W


Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	Corridor function	DIMM DALI	Through wiring	Emergency lighting [h]	Dimensions [mm]	Energy efficiency class	Index
60	3000	6400	PRM MAT						1441/126/60	A+	>> 661341
60	4000	6900	PRM MAT						1441/126/60	A+	>> 661334
60	3000	6400	PRM MAT					3	1441/126/60	A+	>> 661808
60	4000	6900	PRM MAT					3	1441/126/60	A+	>> 661792
60	3000	6400	PRM MAT				LS2		1441/126/60	A+	>> 661884
60	4000	6900	PRM MAT				LS2		1441/126/60	A+	>> 661877
60	3000	6400	PRM MAT	yes					1441/126/60	A+	>> 661488
60	4000	6900	PRM MAT	yes					1441/126/60	A+	>> 661471
60	3000	6400	PRM MAT			yes			1441/126/60	A+	>> 661600
60	4000	6900	PRM MAT			yes			1441/126/60	A+	>> 661594
60	3000	6400	PRM MAT	yes	yes	yes			1441/126/60	A+	>> 661723
60	4000	6900	PRM MAT	yes	yes	yes			1441/126/60	A+	>> 661716

*Tolerance +/- 10%

VECTOR 3 LED

LED

LUMINOUS INTENSITY DISTRIB. CURVE

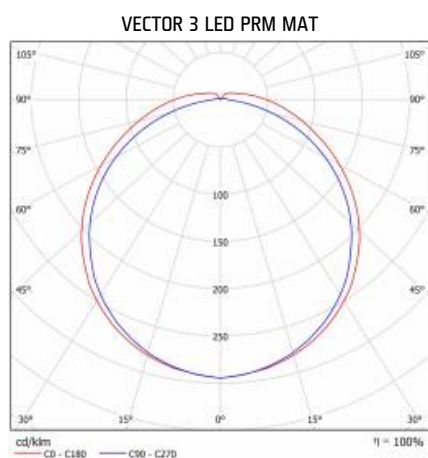

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer.

Revision date: 2020-11-13



Lena Lighting S.A.
ul. Kórnicka 52
63-000 Środa Wielkopolska

tel. +48 61 28 60 300
e-mail: office@lenalighting.pl
www.lenalighting.pl



The luminaire complies with the EU ROHS Directive 2011/65/UE



This product is a subject to electric and electronic waste equipment regulations (WEEE).



27/2020