



220-240 V | LED |  | IP20 | 

## TECHNICAL PARAMETERS

Ingress protection:	IP20;
Nominal power [W]:	35.00; 70.00; 77.00;
Luminous flux [lm]*:	4300 - 10050
Colour temperature [K]:	3000; 4000;
Colour rendering index:	>80;
SDCM:	≤ 3;
Electrical protection class:	I;
Energy efficiency class:	A+;
Material of the body:	steel; blacha stalowa, aluminium;
Colour of the body:	white;
Optics material:	PMMA;
Optics:	lens;
Mounting version:	surface, suspended; recessed;
Supply voltage [V]:	220-240;
Frequency [Hz]:	50 - 60;
Dimensions [mm]:	85/1435/60;

\*Tolerance +/- 10%

## CHARACTERISTICS

The surface, recessed or suspended (suspension system as a accessories) mounted fixture equipped with energy saving LED GO panels and a lens generating asymmetric light distribution. It was made of powder coated white RAL 9003 steel sheet. Shade – a PMMA iridescent lens of 85% light transmission assures high efficiency of the fixture. Available in two power options: 35W with a single LED GO! Panel and 70W with a double LED GO! panel. Colour temperature: 3000K or 4000K. Fixture's colour rendering index is: CRI>80 and standard deviation colour matching (SDCM): ≤ 3, assuring homogeneity and uniformity of light. Suspension of the luminaire is possible, thanks to special suspension system (accessories).

## APPLICATION

The fixture is equipped with linear lenses assuring asymmetric distribution with a beam angle of 20° that is perfect for illumination of boards, paintings and display cases. An iridescent lampshade disperses light assuring that objects are uniformly illuminated with no light reflex. The fixture is applied mostly in schools, universities, museums and art galleries.

# TABLO LED

**LED**
**AVAILABLE TYPES**
[Click >> index, to see details](#)
**TABLO LED surface, suspended**

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Energy efficiency class	Index
35	3000	4300	A+	<a href="#">&gt;&gt; 514869</a>
35	4000	4650	A+	<a href="#">&gt;&gt; 514876</a>
70	3000	8650	A+	<a href="#">&gt;&gt; 514821</a>
70	4000	9300	A+	<a href="#">&gt;&gt; 514838</a>
77	4000	10050	A+	<a href="#">&gt;&gt; 660412</a>

**TABLO LED recessed**

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Energy efficiency class	Index
35	3000	4300	A+	<a href="#">&gt;&gt; 514883</a>
35	4000	4650	A+	<a href="#">&gt;&gt; 514890</a>
70	3000	8650	A+	<a href="#">&gt;&gt; 514845</a>
70	4000	9300	A+	<a href="#">&gt;&gt; 514852</a>

\*Tolerance +/- 10%

**ACCESSORIES**

Name	Index
SINGLE SUSPENDED CORD	171512
SINGLE SUSPENDED CORD (ROUND BOX)	171635
SINGLE SUSPENDED CORD (SQUARE BOX)	171642
SINGLE ELECTRICAL SUSPENDED CORD (ROUND BOX) TABLO NT	171703
SINGLE ELECTRICAL SUSPENDED CORD (SQUARE BOX) TABLO NT	171710



SINGLE SUSPENDED CORD (171512)



SINGLE SUSPENDED CORD (ROUND BOX) (171635)



SINGLE SUSPENDED CORD (SQUARE BOX) (171642)

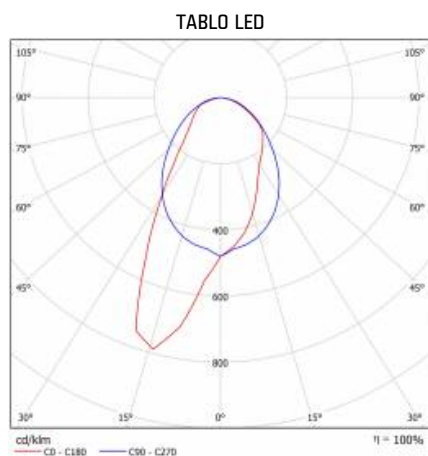


SINGLE ELECTRICAL SUSPENDED CORD (ROUND BOX) TABLO NT (171703)



SINGLE ELECTRICAL SUSPENDED CORD (SQUARE BOX) TABLO NT (171710)

# TABLO LED

**LED**
**LUMINOUS INTENSITY DISTRIB. CURVE**


The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer.

Revision date: 2020-11-24



Lena Lighting S.A.  
ul. Kórnicka 52  
63-000 Środa Wielkopolska

tel. +48 61 28 60 300  
e-mail: office@lenalighting.pl  
www.lenalighting.pl



The luminaire complies with the EU ROHS Directive 2011/65/UE



This product is a subject to electric and electronic waste equipment regulations (WEEE).



44/2018; 47/2018