

GAMMA LED BASIC

LED



220-240 V | LED |  | IP54 | IK10

TECHNICAL PARAMETERS

Ingress protection:	IP54;
Impact resistance:	IK10;
Nominal power [W]:	8.00 - 13.00
Luminous flux [lm]*:	800 - 1500
Colour temperature [K]:	4000; 3000;
SDCM:	≤ 3; ≤ 5;
Energy efficiency class:	A+; A;
Material of the body:	PC; PP;
Diffuser type:	OPAL;
Mounting version:	surface;
Dimensions [mm]:	∅220/72; ∅280/72;

*Tolerance +/- 10%

CHARACTERISTICS

Surface mounted, round LED light fitting, ingress protection class IP54 and an integrated energy-saving light source LED GO!. White base; diffuser made of impact resistant PC provides even light distribution and ensures a high impact resistance class (IK10). Additional overvoltage protection (SP500V).

APPLICATION

Surface mounted fitting intended for indoor use in representative rooms and passageways (large conference halls, hotel corridors, studies). Designed for mounting on ceilings and walls. Wide range of diameters and two diffuser versions allow for the same fitting to be used in rooms with different parameters. Well suited to be used as a basic or general interior light source.

GAMMA LED BASIC

LED

AVAILABLE TYPES

[Click >> index, to see details](#)

GAMMA LED BASIC 220


Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	Energy efficiency class	Index
8	4000	800	OPAL		A+	>> 226847
8	4000	800	OPAL	yes	A+	>> 226854
8	4000	800	OPAL	yes	A+	>> 226854/H

GAMMA LED BASIC 280

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	Energy efficiency class	Index
10	4000	980	OPAL		A+	>> 226779
10	3000	800	OPAL		A	>> 226731
10	4000	980	OPAL	yes	A+	>> 226878
10	4000	980	OPAL	yes	A+	>> 226878/H
10	3000	800	OPAL	yes	A	>> 226724
13	4000	1500	OPAL		A+	>> 226687
13	4000	1500	OPAL	yes	A	>> 226694
13	4000	1500	OPAL	yes	A	>> 226694/H

*Tolerance +/- 10%

LUMINOUS INTENSITY DISTRIB. CURVE

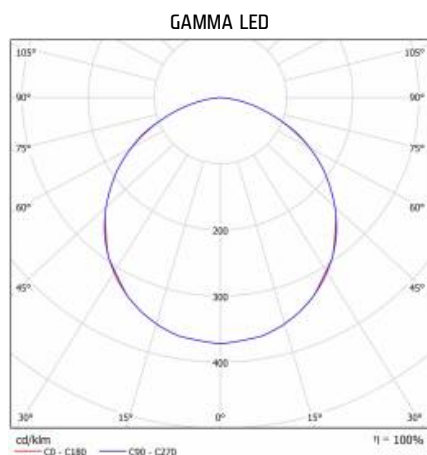

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer.

Revision date: 2020-11-18



Lena Lighting S.A.
 ul. Kórnicka 52
 63-000 Środa Wielkopolska

tel. +48 61 28 60 300
 e-mail: office@lenalighting.pl
 www.lenalighting.pl



The luminaire complies with the EU ROHS Directive 2011/65/UE



This product is a subject to electric and electronic waste equipment regulations (WEEE).



15/2019