

# GAMMA LED



220-240 V | LED |  IP54 | IK10

## TECHNICAL PARAMETERS

Ingress protection:	IP54;
Impact resistance:	IK10;
Nominal power [W]:	12.00;
Luminous flux [lm]*:	1000;
Colour temperature [K]:	4000;
SDCM:	≤ 6;
Energy efficiency class:	A;
Material of the body:	PP;
Diffuser material:	PC;
Diffuser type:	OPAL;
Mounting version:	surface;
Dimensions [mm]:	∅280/72;

\*Tolerance +/- 10%

## CHARACTERISTICS

Surface mounted, round LED light fitting with a luminous flux of 87 lm/W, ingress protection class IP54 and an integrated energy-saving light source LED GO!. White base; diffuser made of impact resistant PC provides even light distribution and ensures a high impact resistance class (IK10).

## APPLICATION

Surface mounted fitting intended for indoor use in representative rooms and passageways (large conference halls, hotel corridors, studies). Designed for mounting on ceilings and walls. Wide range of diameters and two diffuser versions allow for the same fitting to be used in rooms with different parameters. Well suited to be used as a basic or general interior light source.


# GAMMA LED

## AVAILABLE TYPES

[Click >> index, to see details](#)

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	Energy efficiency class	Index
12	4000	1000	OPAL		A	<a href="#">&gt;&gt; 226748</a>
12	4000	1000	OPAL	yes	A	<a href="#">&gt;&gt; 226755/H</a>
12	4000	1000	OPAL	yes	A	<a href="#">&gt;&gt; 226755</a>

## LUMINOUS INTENSITY DISTRIB. CURVE

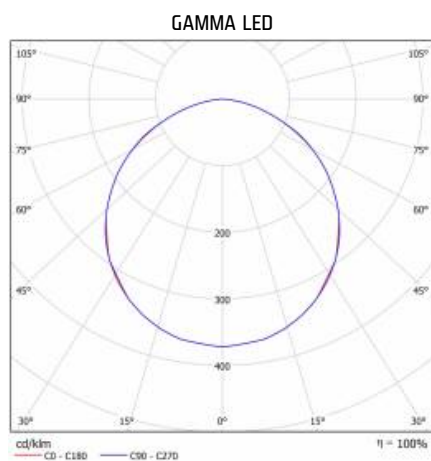

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer.

Revision date: 2019-05-23



Lena Lighting S.A.  
ul. Kórnicka 52  
63-000 Środa Wielkopolska

tel. +48 61 28 60 300  
e-mail: office@lenalighting.pl  
www.lenalighting.pl



The luminaire complies with the EU RoHS Directive 2011/65/UE



This product is a subject to electric and electronic waste equipment regulations (WEEE).



29/2019