

DOBLO LED

LIGHT & DESIGN



220-240 V | LED |  IP20 | IK07 | 

TECHNICAL PARAMETERS

Ingress protection:	IP20;
Impact resistance:	IK07;
Nominal power [W]:	36.00; 50.00;
Luminous flux [lm]*:	3550 - 5350
Colour rendering index:	>80;
SDCM:	≤ 3;
Energy efficiency class:	A+;
Material of the body:	powder coated steel;
Diffuser material:	PS;
Diffuser type:	OPAL;
Mounting version:	suspended;
Dimensions [mm]:	1180/200/52;

*Tolerance +/- 10%

CHARACTERISTICS

Decorative lighting fitting with the effect of indirect light constituting 30% of the total light output of the luminaire. It was made of powder coated sheet steel and equipped with an economical LED GO! panel. Specification: color temperature: 3000K/4000K; CRI>80; LED panels lifespan 50 000h (L70B50) for ta=25°C. DIMM/DALI options available on request.

APPLICATION

A versatile indoor luminaire designed for office rooms and areas of general public use. It is perfect for representational spaces.

DOBLO LED

LIGHT & DESIGN

AVAILABLE TYPES

[Click >> index, to see details](#)

DOBLO LED 36W


Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Colour of the body	DIMM DALI	Energy efficiency class	Index
36	3000	3550	OPAL	white		A+	>> 094002
36	4000	3850	OPAL	white		A+	>> 094019
36	3000	3550	OPAL	white	yes	A+	>> 094088
36	4000	3850	OPAL	white	yes	A+	>> 094095
36	4000	3850	OPAL	grey		A+	>> 094057
36	3000	3550	OPAL	grey		A+	>> 094040
36	3000	3550	OPAL	grey	yes	A+	>> 094125
36	4000	3850	OPAL	grey	yes	A+	>> 094132

DOBLO LED 50W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Colour of the body	DIMM DALI	Energy efficiency class	Index
50	3000	4950	OPAL	white		A+	>> 094026
50	4000	5350	OPAL	white		A+	>> 094033
50	3000	4950	OPAL	white	yes	A+	>> 094101
50	4000	5350	OPAL	white	yes	A+	>> 094118
50	3000	4950	OPAL	grey		A+	>> 094064
50	4000	5350	OPAL	grey		A+	>> 094071
50	3000	4950	OPAL	grey	yes	A+	>> 094149
50	4000	5350	OPAL	grey	yes	A+	>> 094156

*Tolerance +/- 10%

LUMINOUS INTENSITY DISTRIB. CURVE

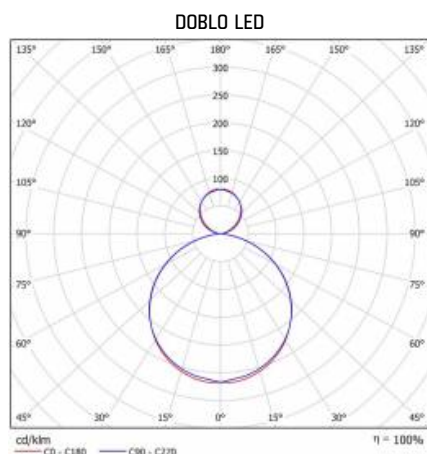

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer.

Revision date: 2020-11-13



Lena Lighting S.A.
ul. Kórnicka 52
63-000 Środa Wielkopolska

tel. +48 61 28 60 300
e-mail: office@lenalighting.pl
www.lenalighting.pl



The luminaire complies with the EU RoHS Directive 2011/65/UE



This product is a subject to electric and electronic waste equipment regulations (WEEE).



100/2016